


# ASSEMBLY

## Haven Table & Media Screens




View Digitally


# Screen Components

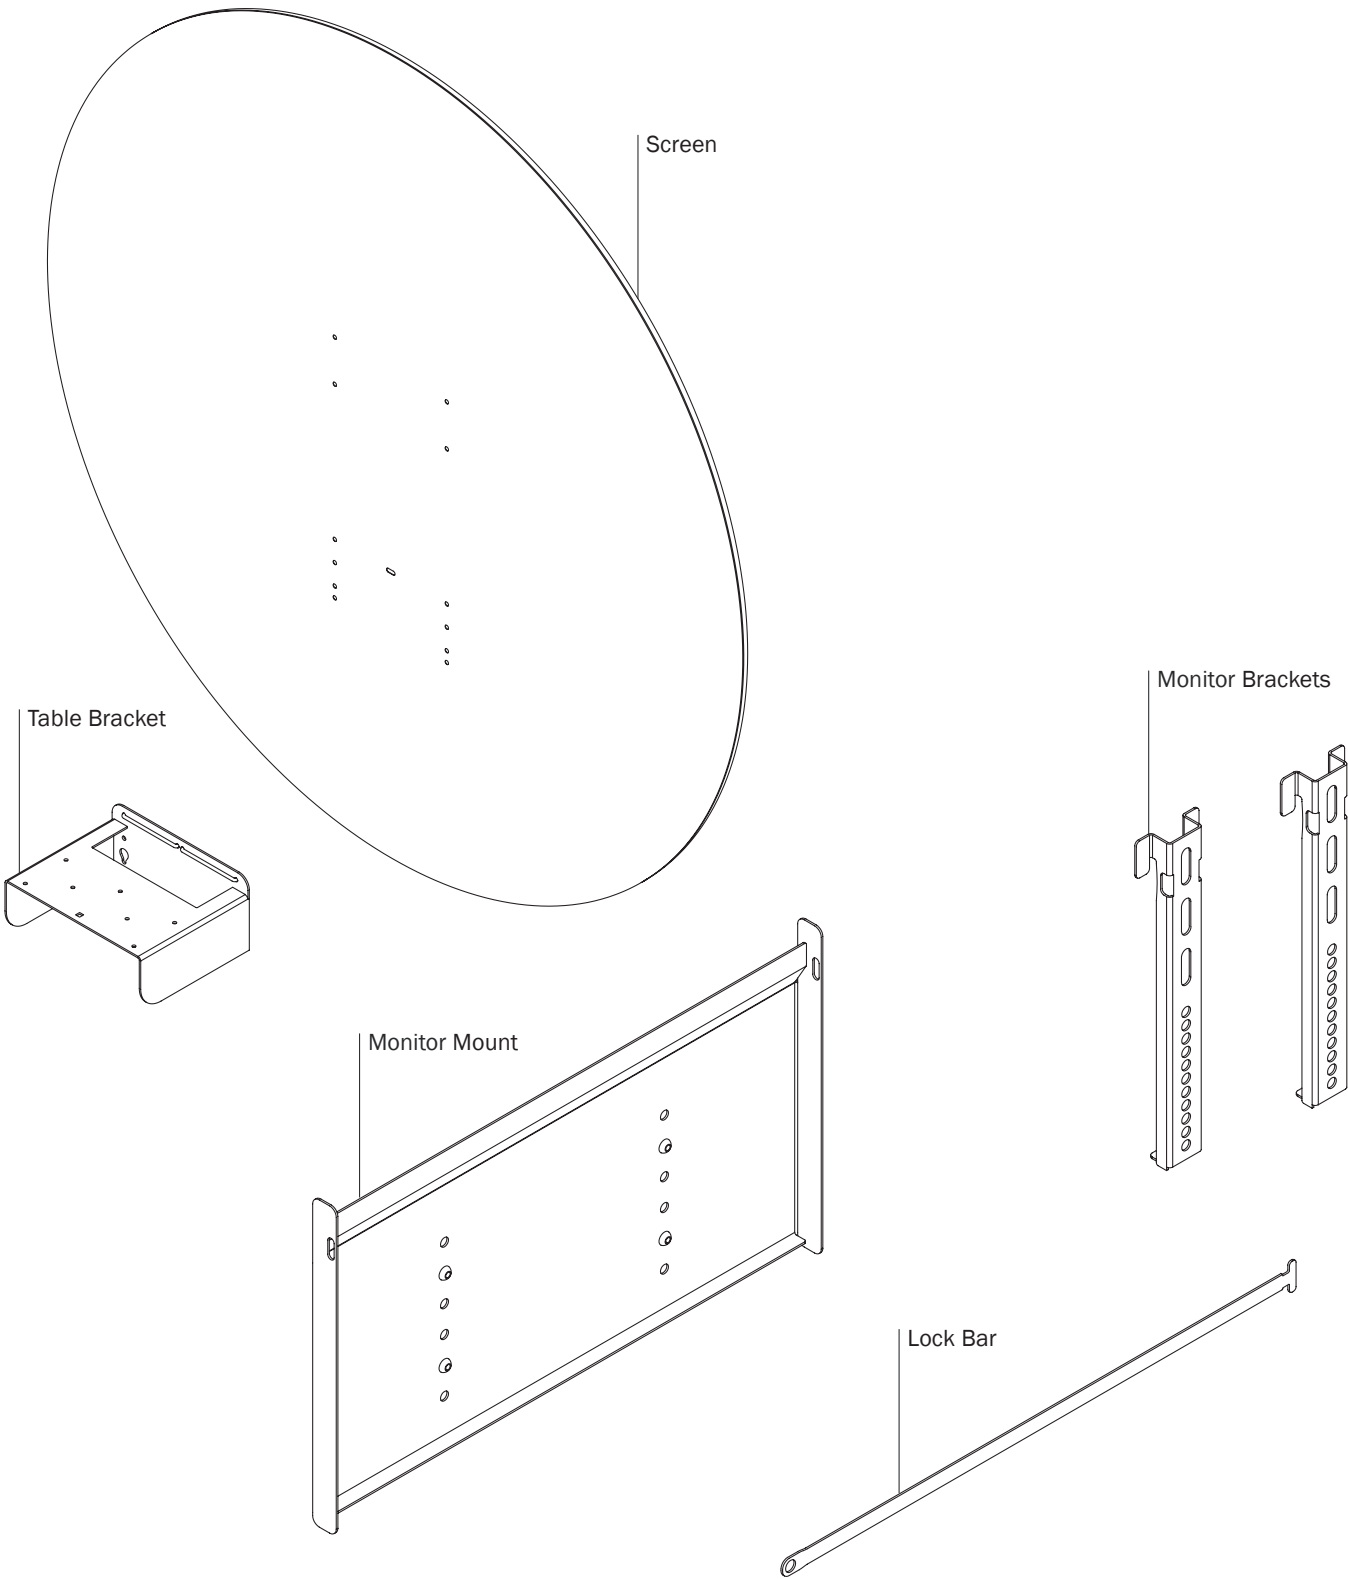

# Hardware




BHSCS M6-1.0  
x 16mm Black  
(125278)



#10 X 1" Torx Head  
Screw (0002147)




8-32 Zinc Plated Nut  
(117011)

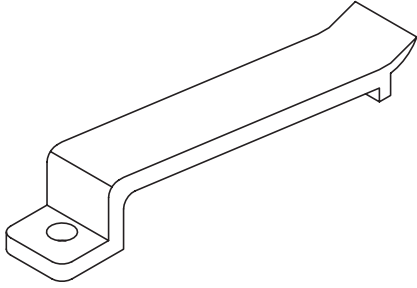

Wire Management  
Clip(486911)

# Tools

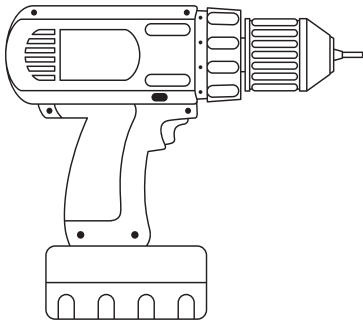


Electric Drill



4mm Hex Bit



T25 Torx





Socket  
11/32"

# 1. Attach the Table Bracket

Align the Table Bracket with the pilot holes in the worksurface and drive (7) screws to secure it in place. Be sure to leave the square hole empty.




#10 X 1" Torx Head  
Screw (0002147)

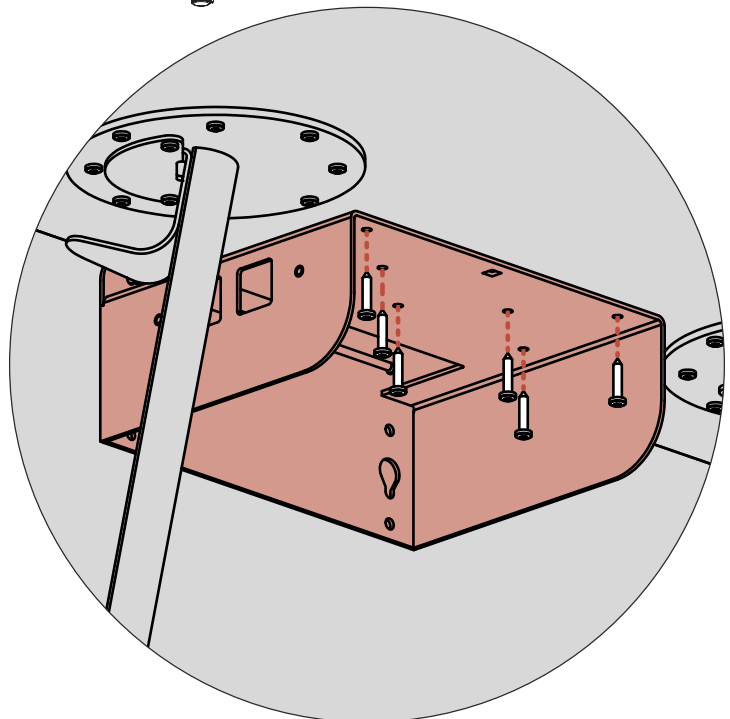
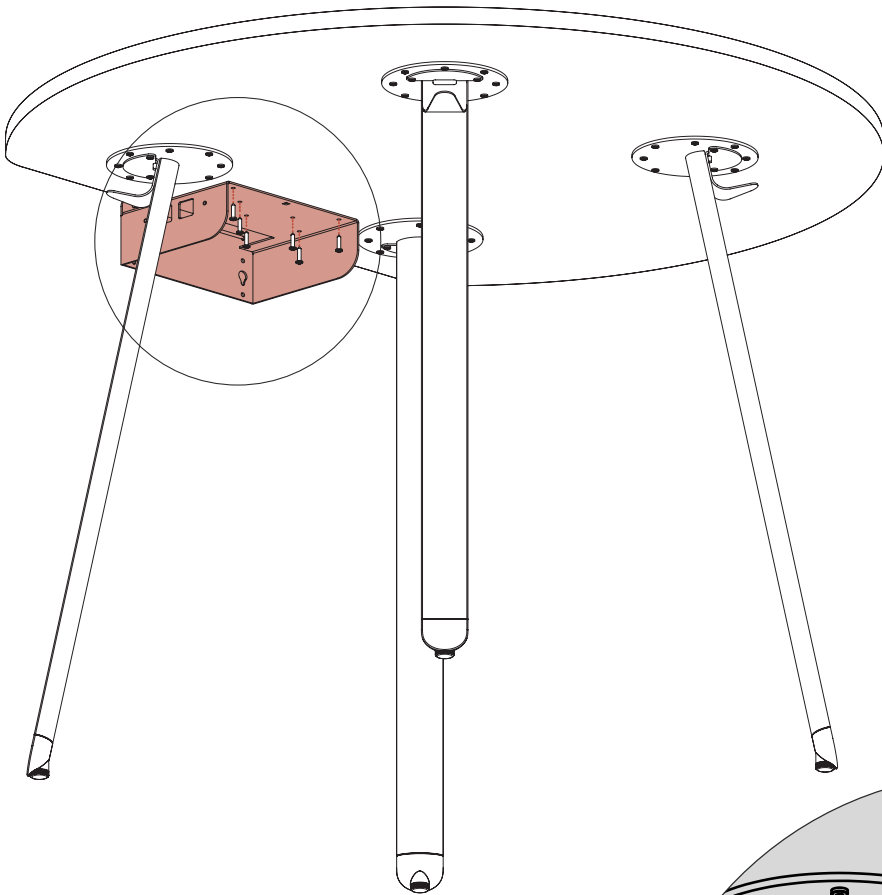


## 2. Drive Screws Into Screen

Drive (2) screws into the second lowest set of holes on the Screen until there is 1/8" gap between the screw head and the Screen.




BHSCS M6-1.0  
x 16mm Black  
(125278)

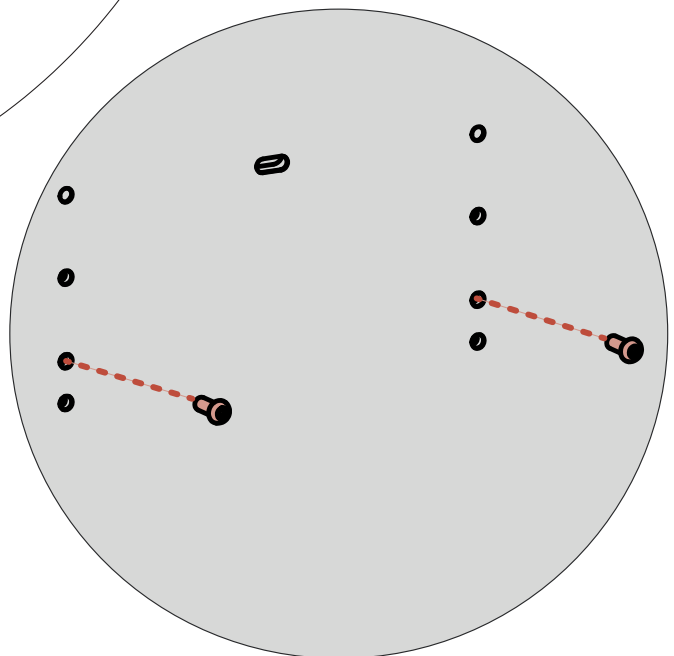
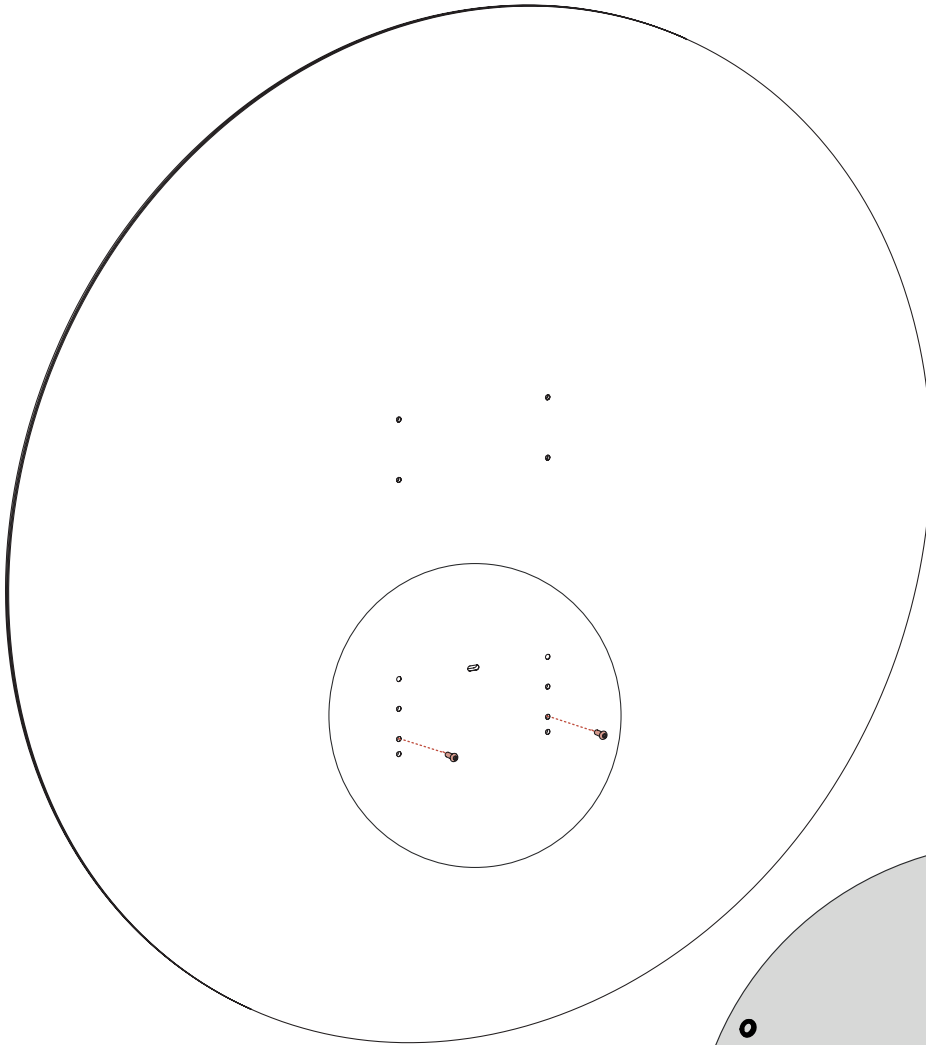


### 3. Attach Screen to Bracket

Drive (4) additional screws and tighten the two existing screws to secure the Screen in place.




BHSCS M6-1.0  
x 16mm Black  
(125278)

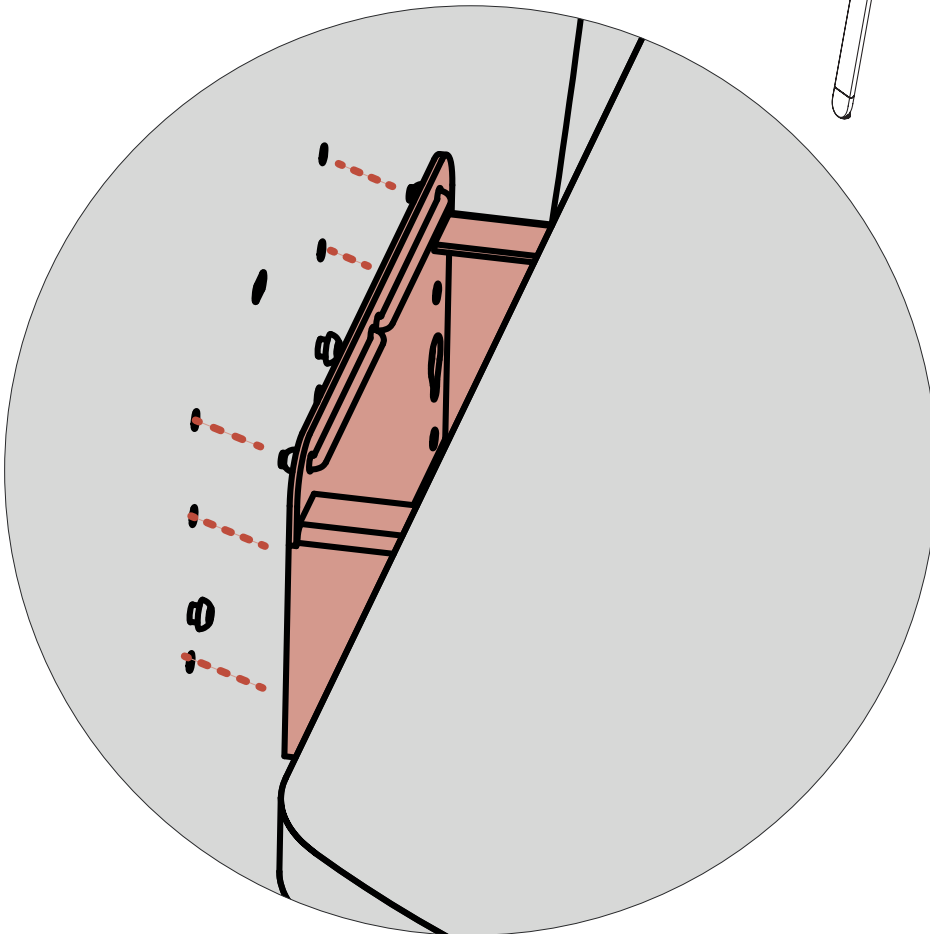
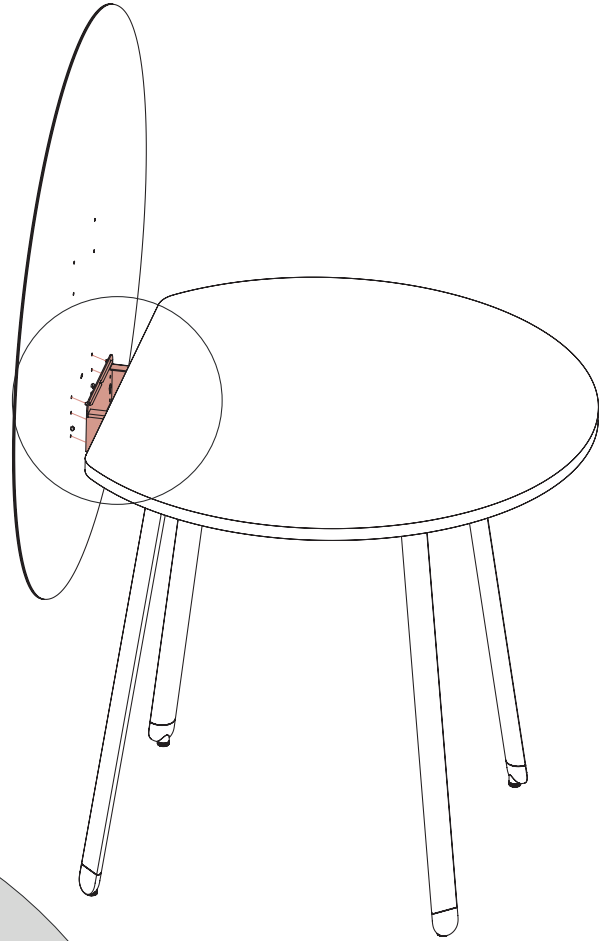


## 4. Secure Screen to Table Bracket

Slide the Screen onto the Table Bracket by aligning the (2) screw heads with the keyslots in the bracket. Lower the Screen until it is fully seated in the keyslots.




BHSCS M6-1.0  
x 16mm Black  
(125278)

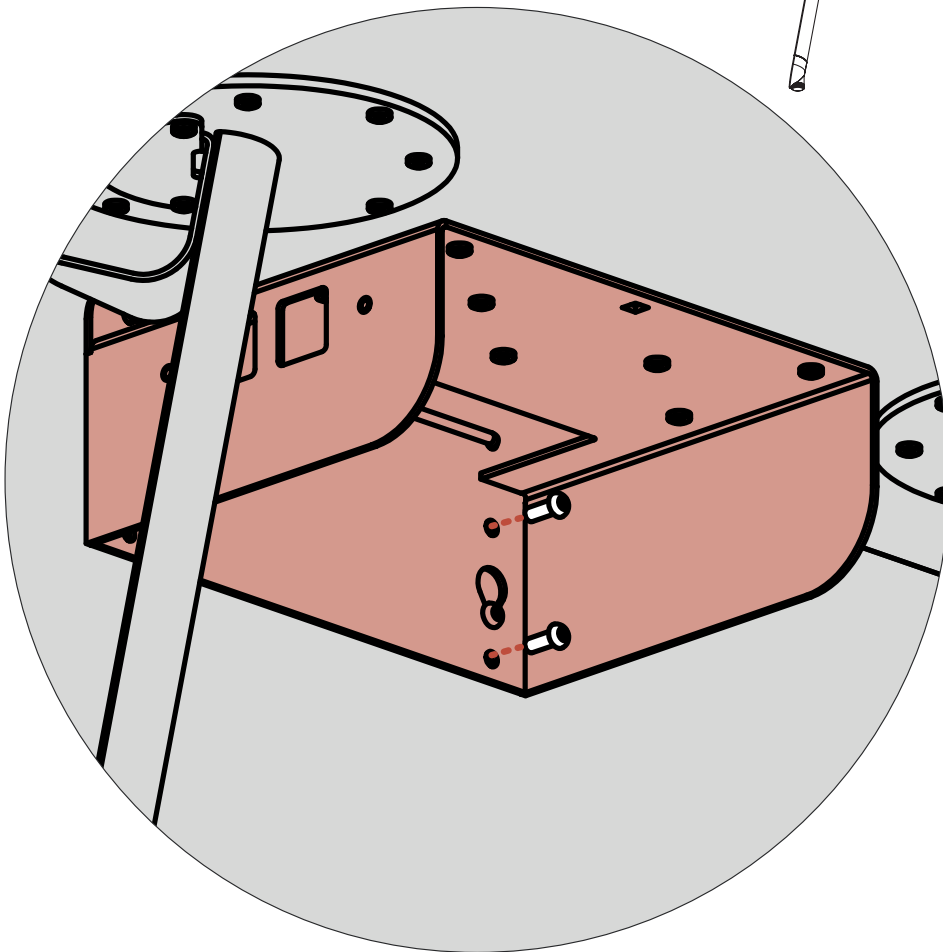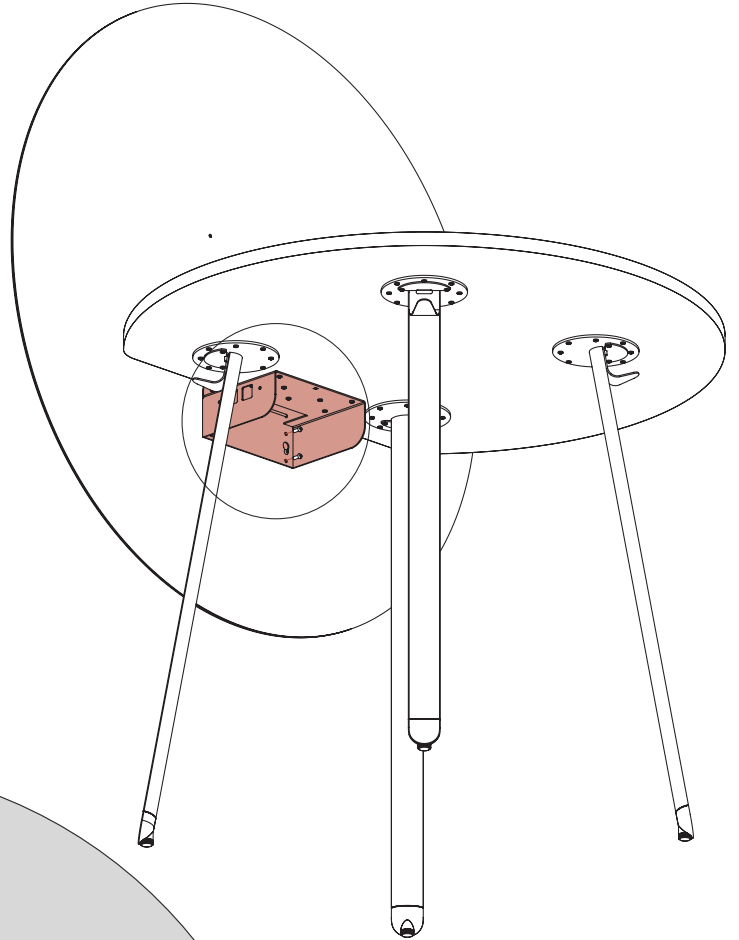


## 5. Attach Wire Management Clip



Align the wire management clip with the square hole in the Table Bracket. Then drive the screw through the wire management clip until secure



Wire Management  
Clip(486911)



#10 X 1" Torx Head  
Screw (0002147)

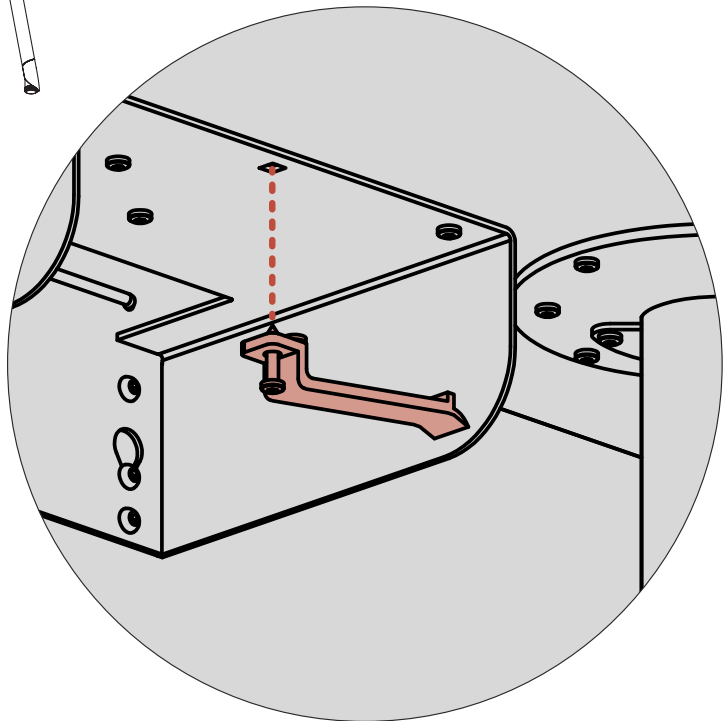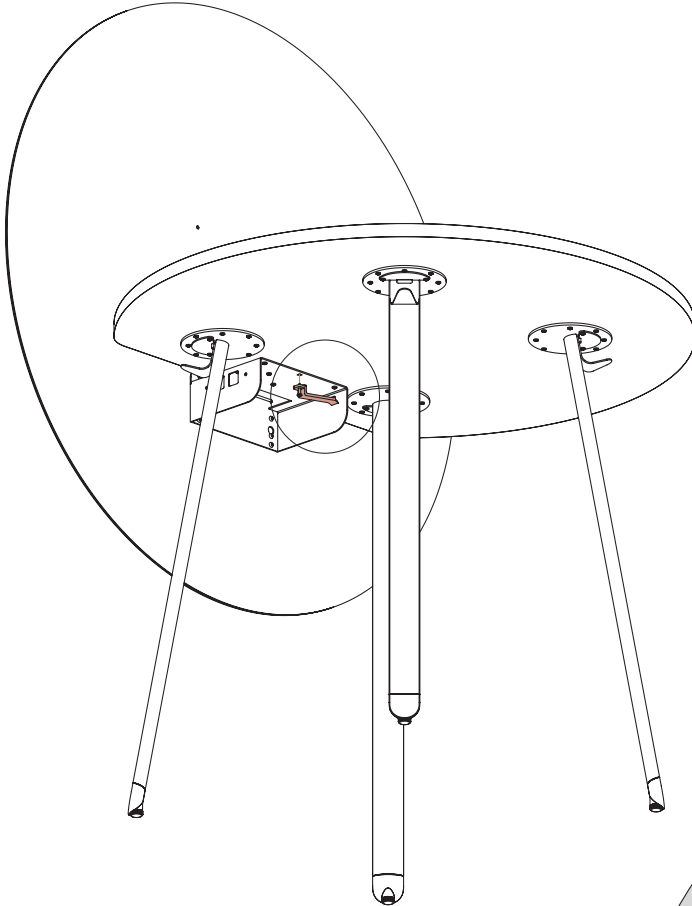





## 6. (Optional) Connect Power to Table Bracket

Situate the power unit in the associated power bracket. Slide the assembly on the included studs on the side of the Table Bracket. Thread a nut on each stud to secure the unit in place.




8-32 Zinc Plated Nut  
(117011)

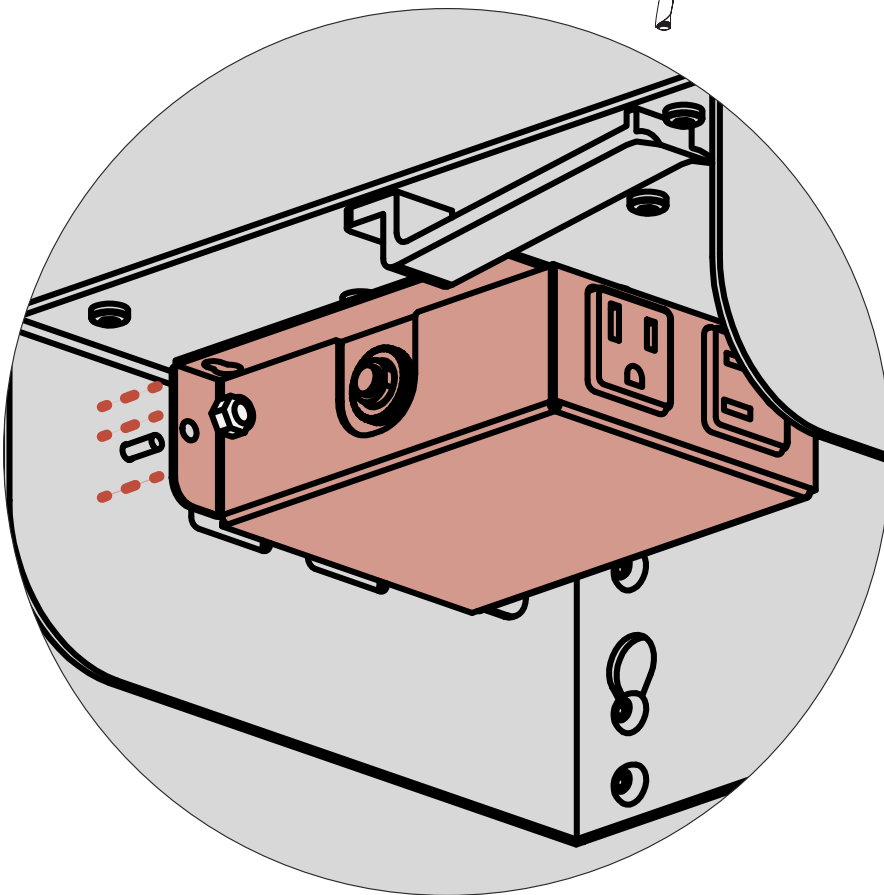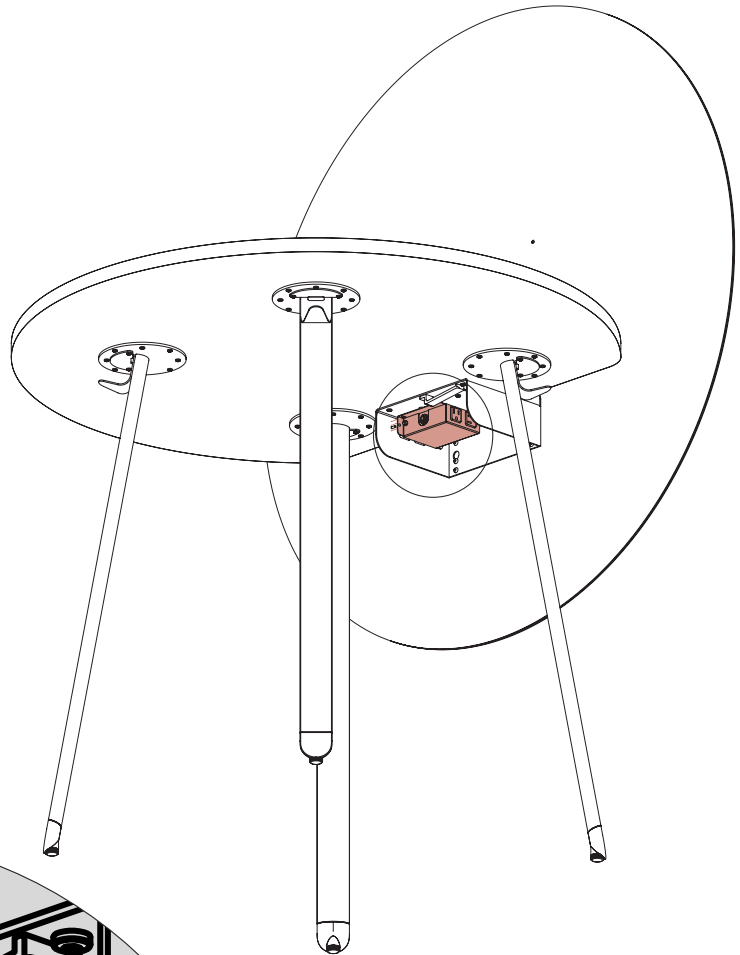


## 7. (Optional) Attach Monitor Mount



Align the Monitor Mount with the holes in the Screen and secure it with (4) screws. The additional holes can be used to raise or lower the Monitor. Attach the Monitor brackets to the back of the Monitor using the provided Monitor mount hardware. The additional holes in the brackets can be used to adjust the height of the Monitor. Plug in the power cable and any additional data cables to the Monitor.



BHSCS M6-1.0  
x 16mm Black  
(125278)

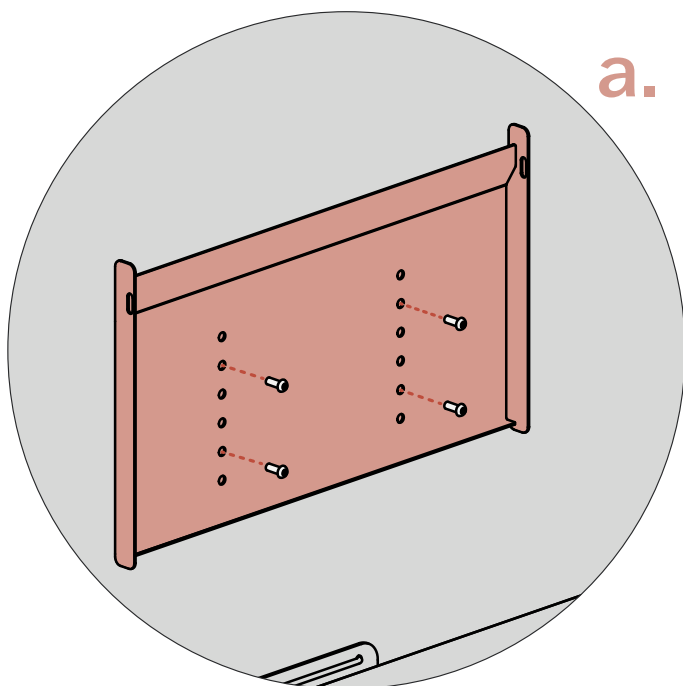


a.

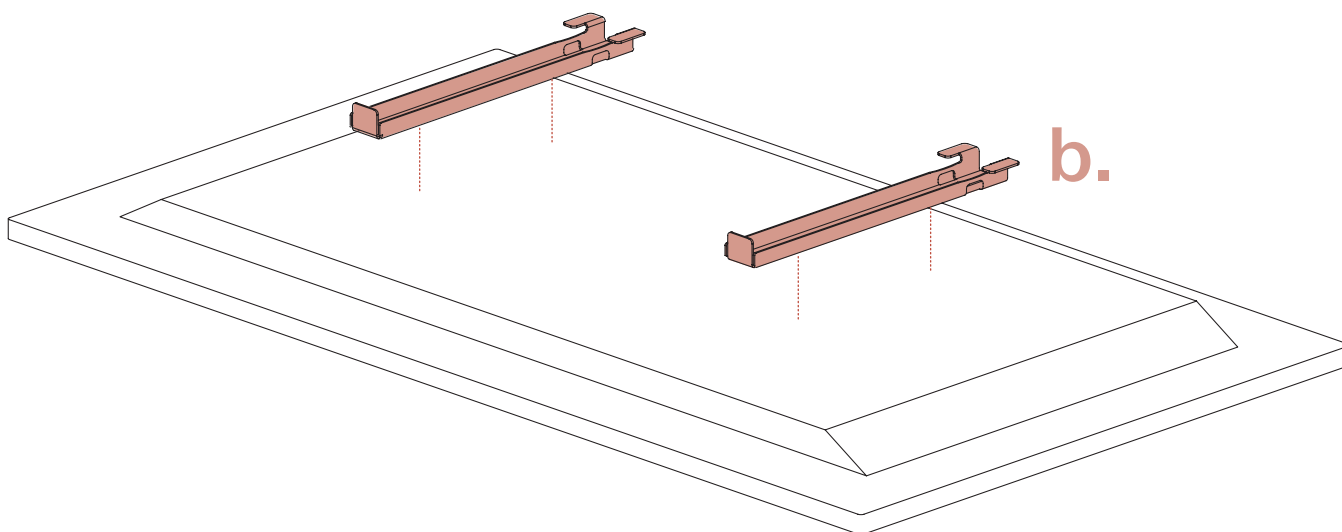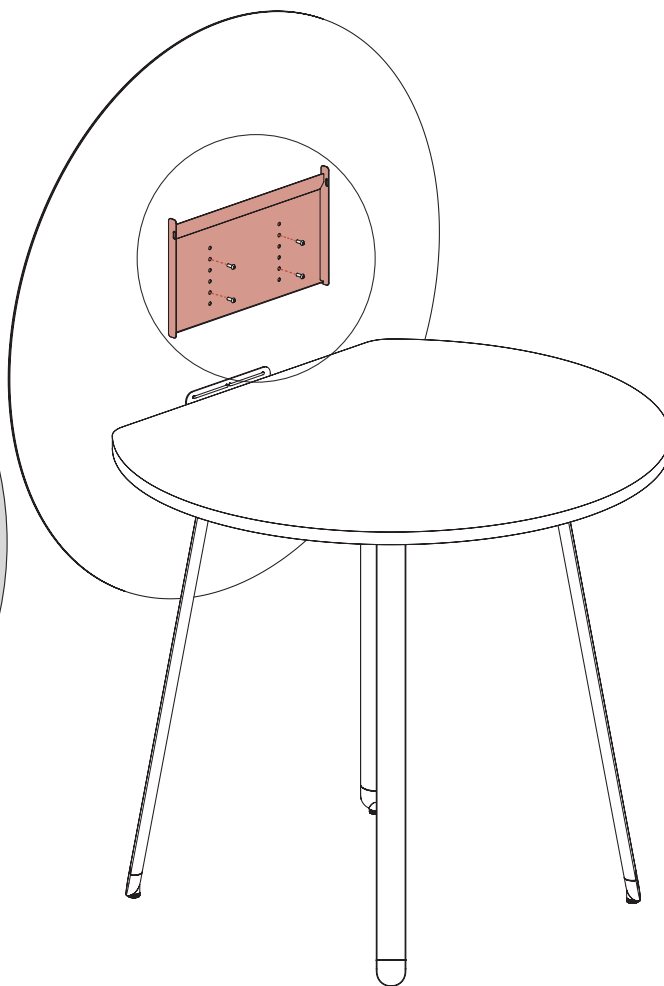

b.

## 8. (Optional) Mount Monitor to screen

Hang the Monitor/bracket assembly on the Monitor mount and route cables down through the elastic cording.

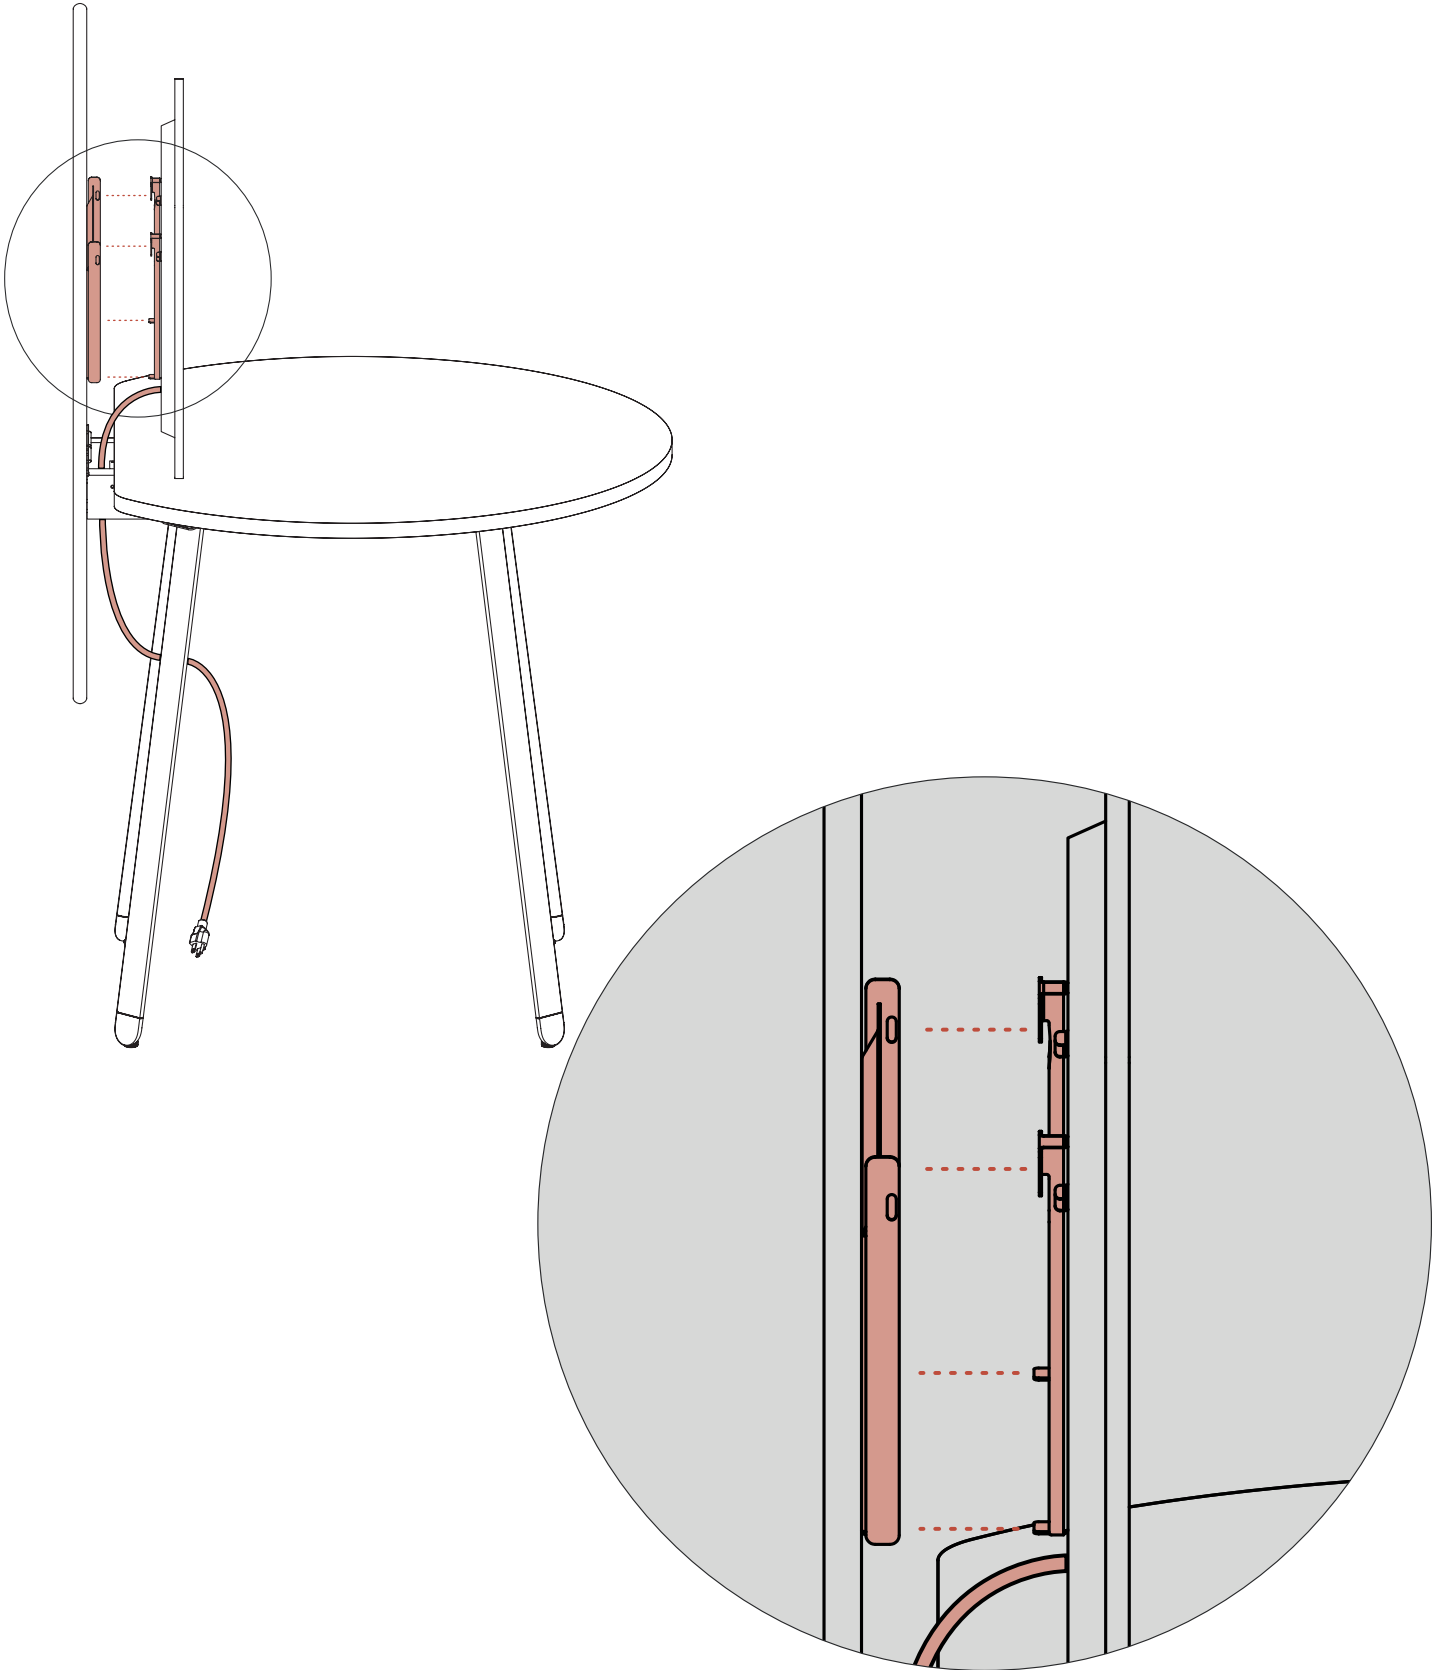

## 9. (Optional) Lock TV to screen

Slide the Lock Bar through the Monitor Mount and through both Monitor brackets. Place a lock through the hole in the end of the lock bar. (Monitor not shown for visibility)

