



ASSEMBLY

Tonic Dual Sided Powerpole

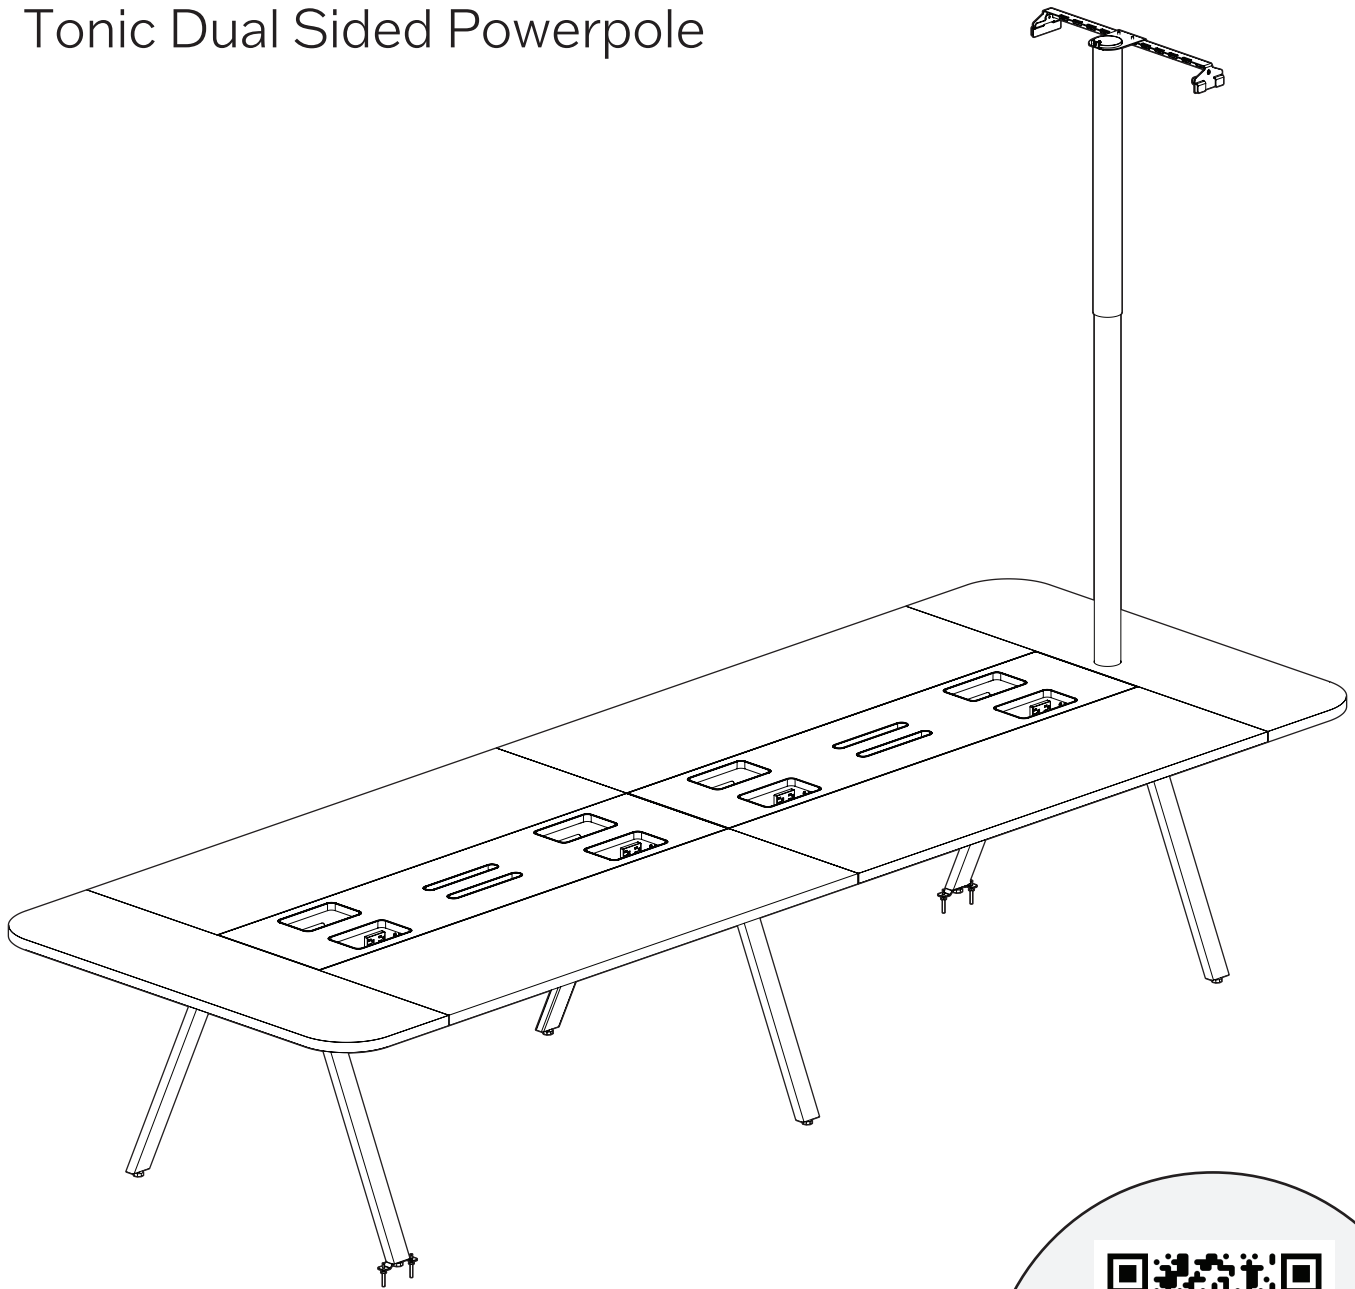


View Digitally

Hardware




M6-1 x 12 SCREW
(0001140)


Tonic Powerpole Components




SPLICE PLATE




END BRACKET




INFEEED




CEILING BAR
CLAMP



CEILING BAR

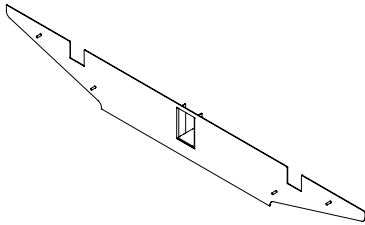

POWER POLE END
COVER

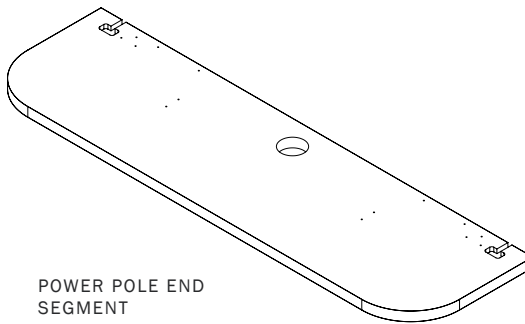


POWER POLE END
SEGMENT



POWER POLE

Tools

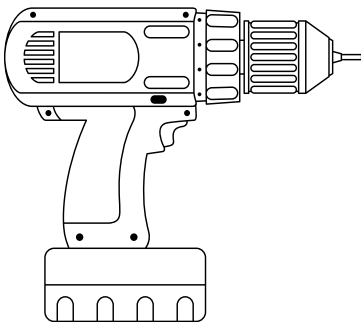

Electric Drill



P2 Phillips
Driver Bit




6mm Hex Drill/
Driver Bit

1. Power Pole Install


Drop the power pole into the power pole end segment.

Note: These instructions are subsequent to **step 8. Secure Surfaces and Alignment**, in the *Tonic Dual Sided Workbench Assembly Instructions*.

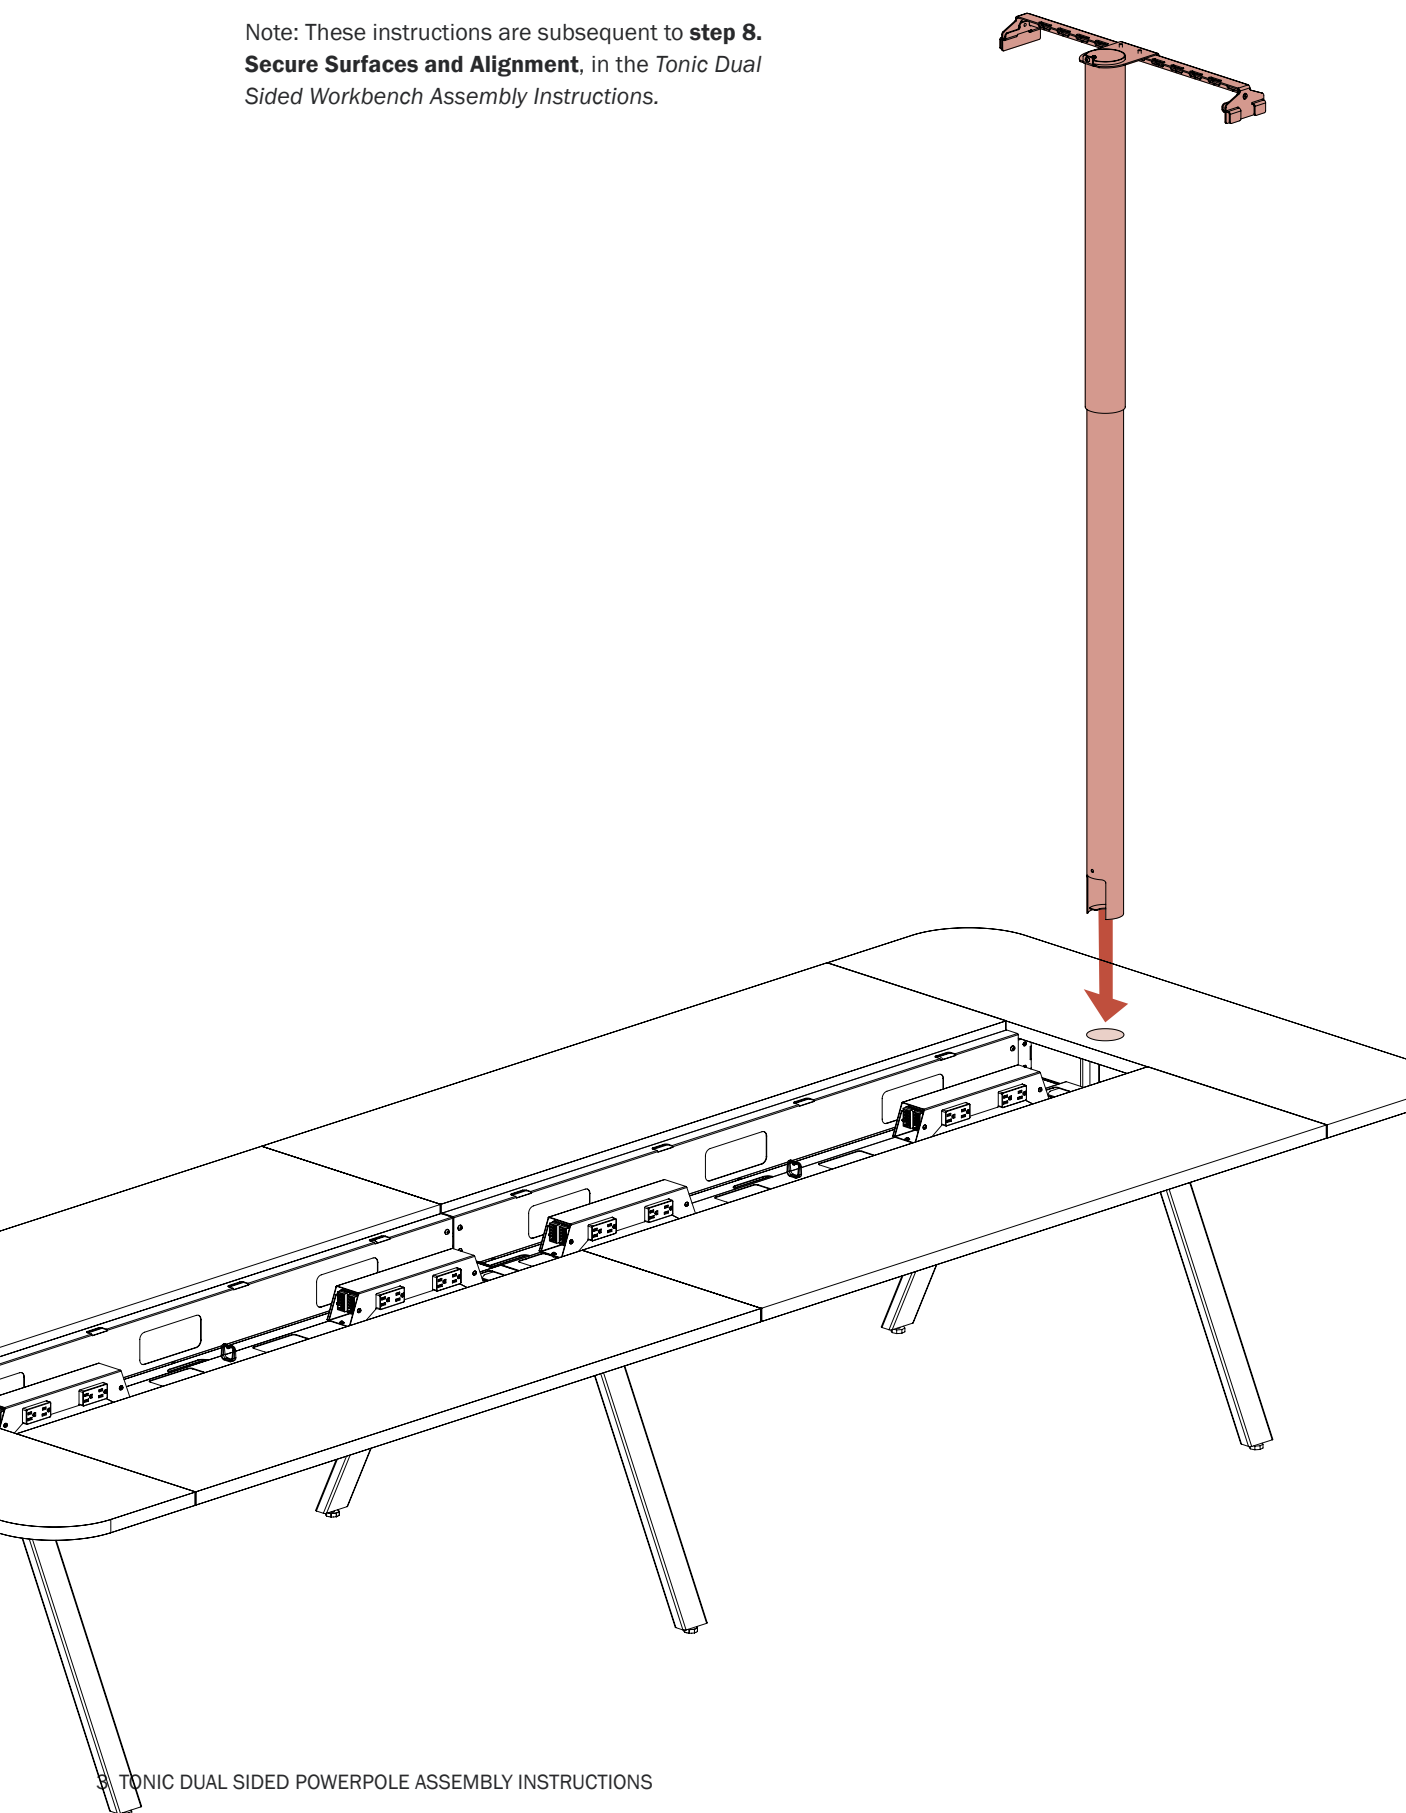


2. Attach Clamp to Ceiling Bar

Fit the ceiling bar clamp into the slots at the end of the ceiling bar, and rotate into place, as shown below.

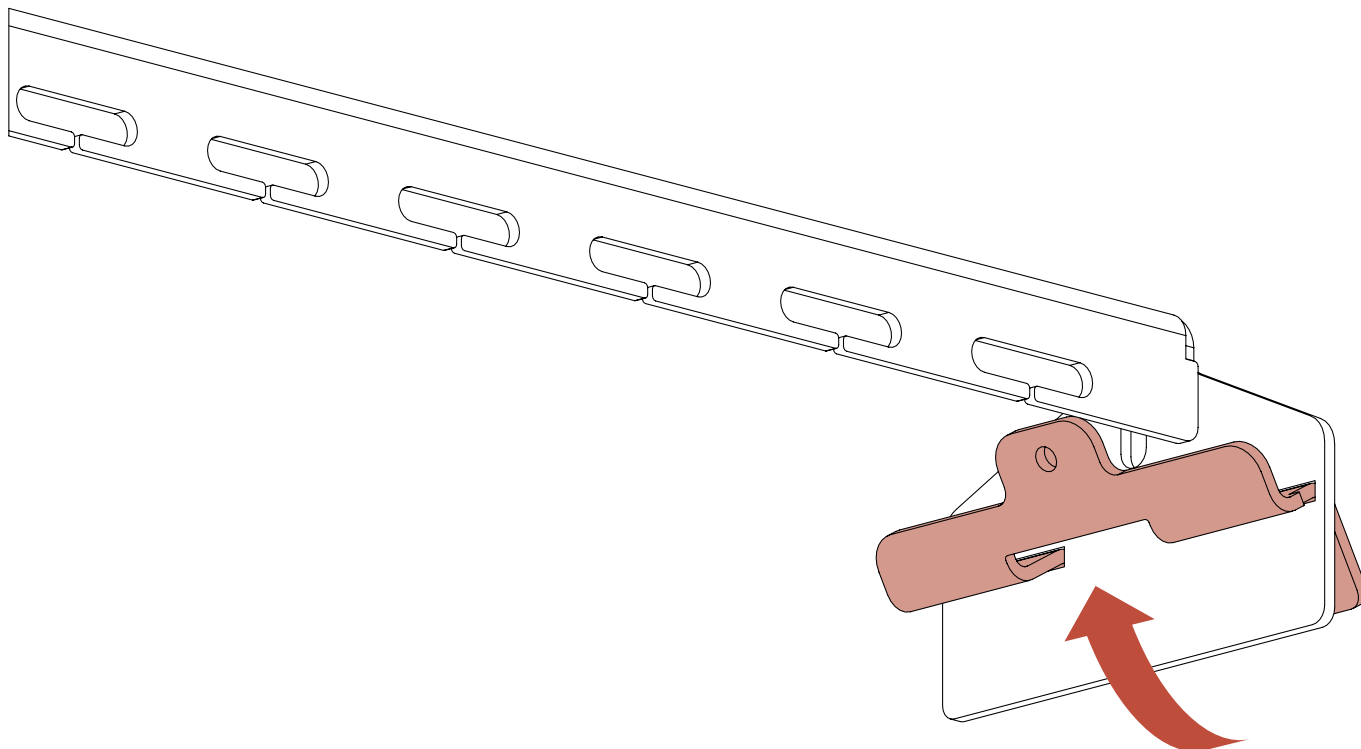


3. Mount Ceiling Bar to Ceiling

Hook the ceiling bar on the 2' ceiling grid and screw the clamp to the ceiling bars with one screw (0001140) on each side. Note: Ensure that ceiling system has required weight capacity.




M6-1 x 12 SCREW
(0001140)

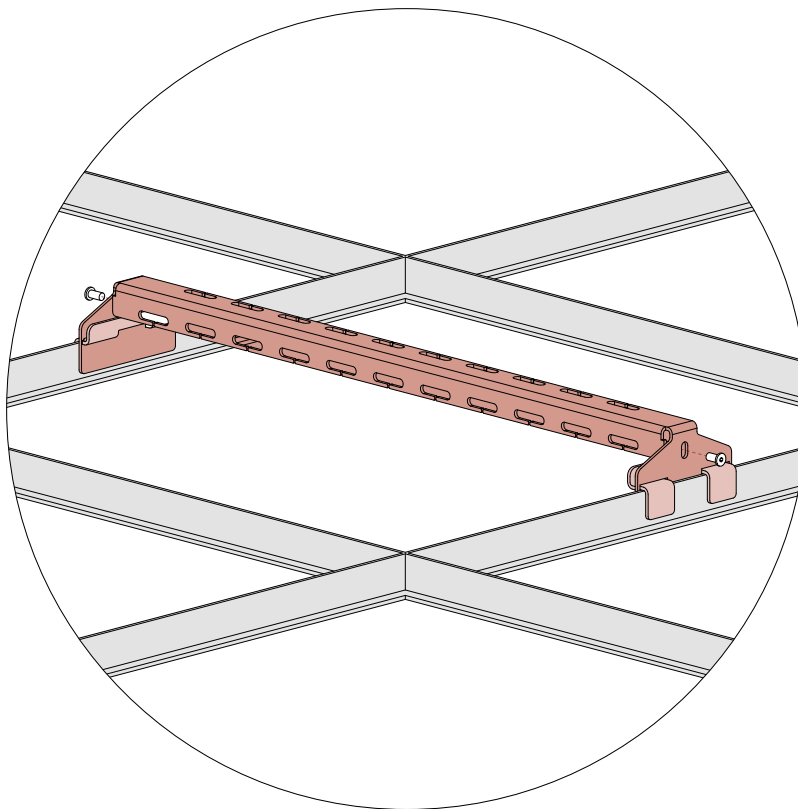


4.

Connect Power Pole to Ceiling

Hook the power pole onto the ceiling bar, and align the pole with the bracket at the desired position. Screw pole to the ceiling bar using (4) screws (0001140).



M6-1 x 12 SCREW
(0001140)

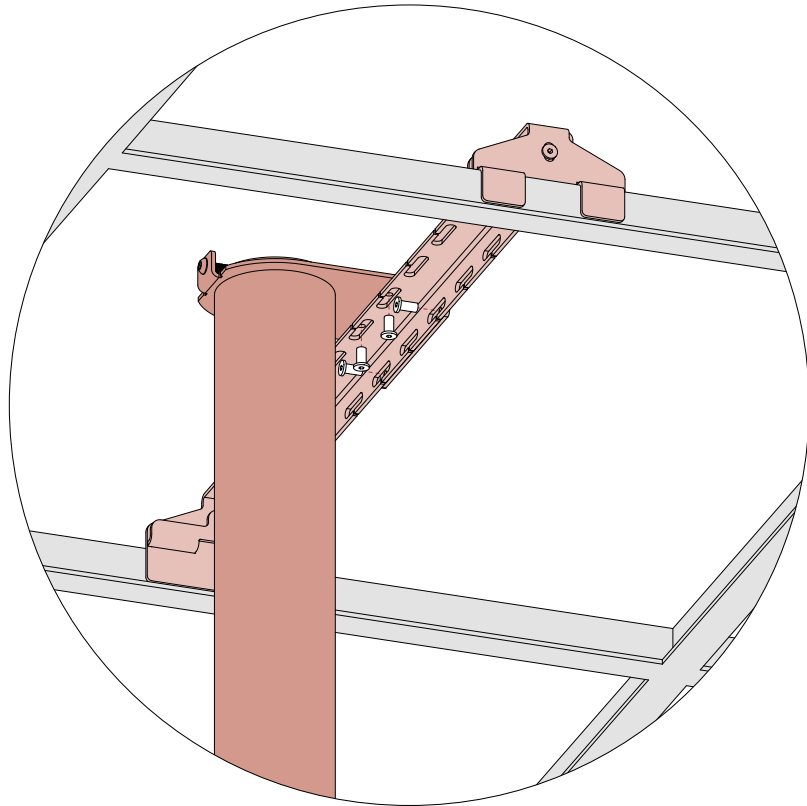

5. Run Cables Down Pole

(A) Run the cables down from the roof through the pole, then through the opening of the rail end (B). Wire as normal.

